


Model 2003FL: LOW FLOW Blender w/Flow Meter & Bleed Control

2003FL LOW FLOW Blender w/ Flow Meter & Bleed Control

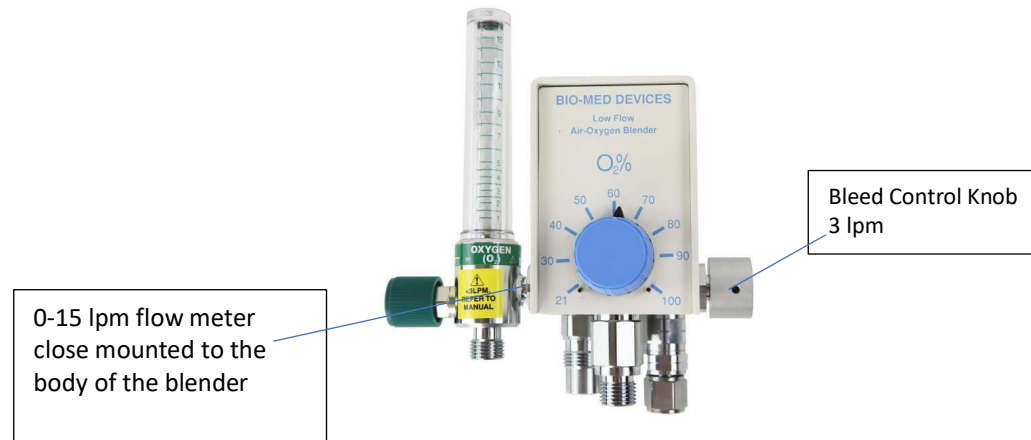

**Ideal for the Labor and Delivery setting
(where generally only a single 0-15 lpm flow meter is needed for resuscitation purposes)**

Key features

Comes with 0-15 lpm flow meter close mounted to the body of the blender

That allows the user to install a flow meter of their choice

A BLEED CONTROL knob on the Right-side

That allows the user to activate the bleed flow (3 lpm) in situations where accuracy is desired for use below 3 lpm
The bleed control switch allows the bleed flow to be disabled.

This can save costs by allowing the blender to be connected and ready, but not be wasting 3 lpm of gas 24 x 7 when not in use

This may be absolutely necessary in units where air may not be piped in.

Additional DISS Oxygen Port on the bottom

Standard input fittings are DISS for Air and Oxygen

But, NIST fittings on the blender is also available.

Output Port Flow Range:

Left – 0-15 LPM Flowmeter (green O2 label) Bottom – 3-30 LPM (no bleed)

0-30 LPM (with bleed) Right – Knob to switch bleed on & off

Bleed for Flows <3 LPM: 3 LPM Size: 5.6W x 6.7H x 4.6D inches

Model 2003FL: LOW FLOW Blender w/Flow Meter & Bleed Control

Technical Specifications

Oxygen Concentration Range	21 to 100 %
Number of ports	2 (left side and bottom)
Flowmeter Range	3-15 lpm (with bleed flow off) 1-15 lpm (with bleed flow on)
Flow Range Accuracy	0-3 lpm when bleed switch is on, 3-30 lpm when bleed switch is off
Accuracy	+/- 3% full scale
Bleed flow	3 lpm (when activated)

Ordering information

200FL	Low Flow blender with left side and bottom DISS port and Bleed control knob on right side
2007	Standard input fittings on the Blenders are DISS AIR and OXYGEN. If you want NIST input fittings, add this part number to the order

Dimension & Weight

Height	Width	Depth	Weight
6.64" (16.9 cm)	5.48" (13.9 cm)	4.56" (11.6 cm)	2.38 lbs. (1.08 kg)

Optional Accessories

High Pressure Hose Kit	2', 3' or 10' long
Bracket	Wall Mount, Pole Mount, Rail, headwall configuration
Quick Connect Fittings	Ohmeda, Chemtron, Quick Connect fittings

**This data is subject to change without a prior notice.*