


Model 2003P: Standard LOW FLOW Blender w/3 Ports

2003P Standard LOW FLOW Blender w/ 3 Ports

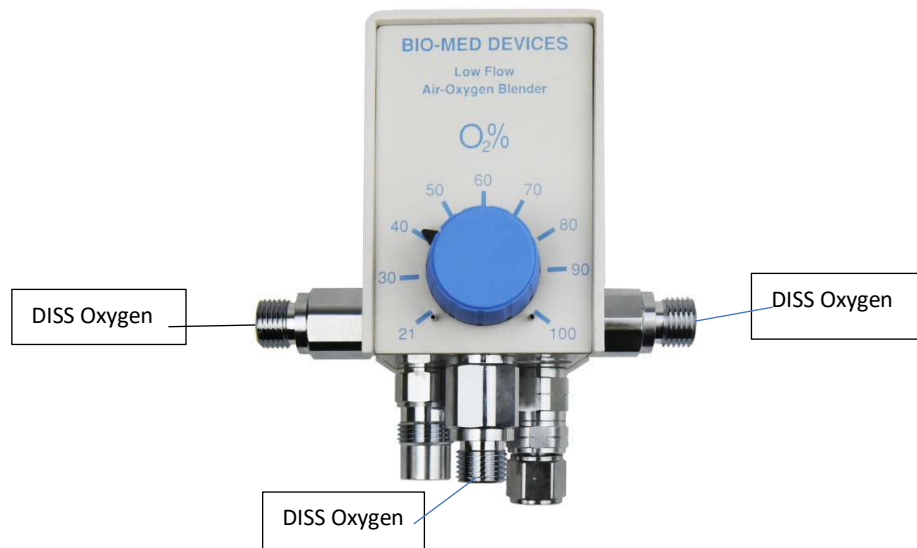

Model 2003P features the standard low flow blender (with an Oxygen DISS fitting on both the left and right sides) with an additional oxygen DISS port on the bottom for added connectivity

Key features

Configured with **2 Oxygen DISS fitting on the LEFT and RIGHT sides with**

Additional DISS Oxygen Port on the bottom

The Bleed Flow (3 lpm) is activated when a flow meter is installed on the right side port and remains active until either the right side flowmeter removed, or the hoses are disconnected from the gas

Standard input fittings are DISS for Air and Oxygen

But, NIST fittings on the blender is also available.

Model 2003P: Standard LOW FLOW Blender w/3 Ports

Technical Specifications

Oxygen Concentration Range	21 to 100 %
Number of output ports	3 (Left, Right and Bottom)
Flow Range Accuracy	0-30 lpm w/bleed active (right side port being used) 3-30 lpm w/no bleed active
Accuracy	+/- 3% full scale
Bleed flow	3 lpm (when activated)

Ordering information

2003F	Low Flow Blender with DISS Ports on left, right and bottom
2007	Standard input fittings on the Blenders are DISS AIR and OXYGEN. If you want NIST input fittings, add this part number to the order

Dimension & Weight

Height	Width	Depth	Weight
5.3" (13.5 cm)	4.77" (12.1 cm)	4.56" (11.6 cm)	2.53 lbs. (1.15 kg)

Optional Accessories

High Pressure Hose Kit	2', 3' or 10' long
Bracket	Wall Mount, Pole Mount, Rail, headwall configuration
Quick Connect Fittings	Ohmeda, Chemtron, Quick Connect fittings

**This data is subject to change without a prior notice.*